

FORGED STEEL GLOBE VALVE

Design and Manufacturing : API 602 / BS EN ISO 15761

Inspection and Testing : API 598

Socket Weld Standard : ASME B 16.11

Screwed End Standard : ASME B1.20.1

Butt Weld Standard : ASME B 16.25

Flange Standard : ASME B16.5

Face To Face for General Valves : As per Manufacturer's Standard

Face To Face for Flanged Valves : ASME B 16.10


Special Feature : Locking arrangement, Stem extension, Nipple Extension, etc.



CLASS 150# (Flange End)					
SIZE	F/F	ØF	FT	ØA	WT(KG)
15MM	108	90	9.6	15.8	2.60
20MM	117	100	11.2	21	3.50
25MM	127	110	12.7	26.7	5.00
40MM	165	125	15.9	41	9.50
50MM	203	150	17.5	52.5	15.30

CLASS 300# (Flange End)					
SIZE	F/F	ØF	FT	ØA	WT(KG)
15MM	152	95	12.7	15.8	3.20
20MM	178	115	14.3	21	4.70
25MM	203	125	15.9	26.7	6.80
40MM	229	155	19.1	41	12.50
50MM	267	165	20.7	52.5	17.90

CLASS 600# (Flange End)					
SIZE	F/F	ØF	FT	ØA	WT(KG)
15MM	165	95	14.3	15.8	3.60
20MM	190	115	15.9	21	5.10
25MM	216	125	17.5	26.7	7.20
40MM	241	155	22.3	41	13.50
50MM	292	165	25.4	52.5	19.90

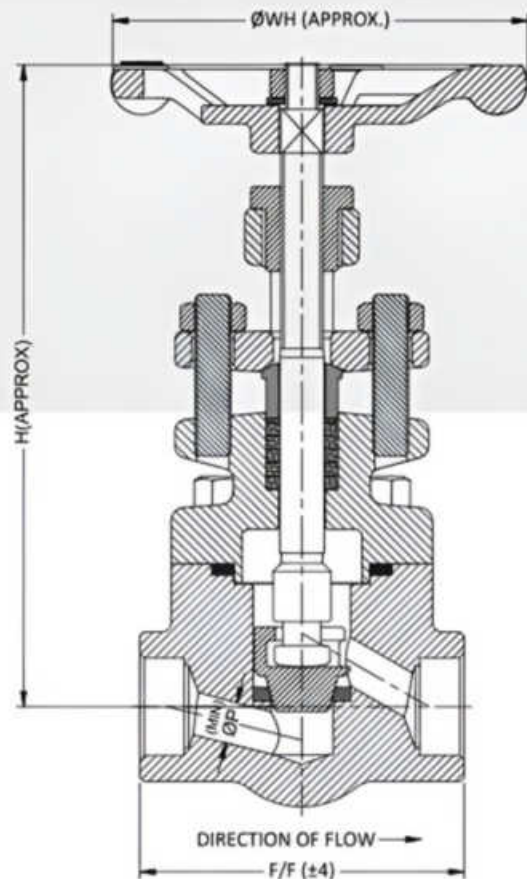

SOCKET / SCREWED END

CLASS 800#						
SIZE	F/F	ØP	H(O)	H(C)	ØHW	WT(KG)
15MM	87	9	148	141	90	1.70
20MM	92	12	152	145	90	2.00
25MM	106	17	186	172	116	3.20
40MM	127	25	236	215	150	6.40
50MM	142	29	279	250	150	10.60

CLASS 1500#						
SIZE	F/F	ØP	H(O)	H(C)	ØHW	WT(KG)
15MM	92	8	152	145	90	2.30
20MM	106	9	183	169	116	3.35
25MM	127	14	231	210	150	6.65
40MM	142	25	273	244	150	11.20
50MM	172	27	321	297	200	14.50

CLASS 2500#						
SIZE	F/F	ØP	H(O)	H(C)	ØHW	WT(KG)
15MM	106	7	183	169	116	4.00
20MM	127	8	228	207	150	7.00
25MM	142	12	268	239	150	11.70
40MM	172	22	321	297	200	15.00
50MM	-	-	-	-	-	-